


* ALL DIMENSIONS ARE IN INCHES *

TOLL FREE (USA & CANADA) : 1-888-ANTI-RAM (888-268-4726)
 410-286-3375 : FAX 410-479-0175
 P.O. BOX 307, DUNKIRK, MD 20754 U.S.A.
 INFO@SECURESITEDESIGN.COM
 WWW.SECURESITEDESIGN.COM

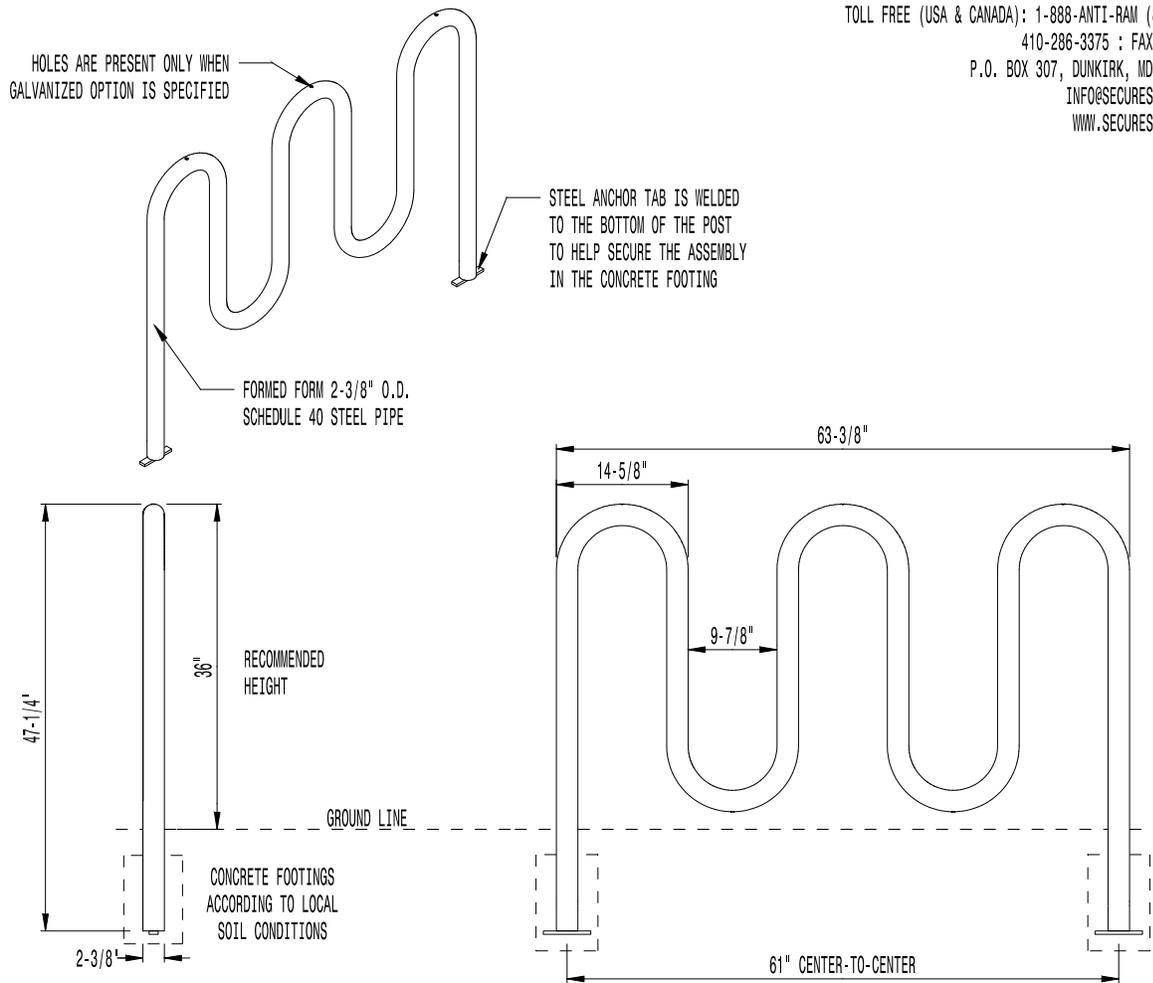

AVAILABLE OPTIONS:

- POWDER COATING
- 10 AVAILABLE COLORS, 2 OPTIONAL METALLIC
- CUSTOM COLORS (INCLUDING THE RAL RANGE AT AN ADDITIONAL COST)
- (ALL POWDER COAT FINISHES ARE DONE AT VICTOR STANLEY, INC. (VSI) TO MATCH THE VSI PRODUCT LINE)
- OTHER FINISHES: GALVANIZED (SPECIAL QUOTE NEEDED)

MOUNTINGS OPTIONS:

STANDARD IN-GROUND (AS SHOWN) AND SURFACE MOUNT WITH ROUND FLANGE

NOTES:

1. DRAWINGS NOT TO SCALE. DO NOT SCALE DRAWINGS.
2. ALL FABRICATED METAL COMPONENTS ARE STEEL SHOTBLASTED, ETCHED, PHOSPHATIZED, PREHEATED, AND ELECTROSTATICALLY POWDER-COATED WITH T.G.I.C. POLYESTER POWDER COATINGS. PRODUCTS ARE FULLY CLEANED AND PREHEATED, PREHEATED AND COATED WHILE HOT TO FILL CREVICES AND BUILD COATING FILM. COATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH AVERAGES 8-10 MILS (200-250 MICRONS).
3. THIS SECURE SITE DESIGN, LLC. PRODUCT MUST BE PERMANENTLY AFFIXED IN THE GROUND. CONSULT YOUR LOCAL CODES FOR REGULATIONS.
4. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
5. THIS PRODUCT IS SHIPPED FULLY ASSEMBLED.



BIKE RACK
 SHOWN: STANDARD IN-GROUND MOUNT

**SECTION 12 93 00 (02870)
SITE FURNISHINGS**

**PART 1 GENERAL
Model: BRCS-105**

1.1 DESCRIPTION

- A. Section includes information, materials, and options for products manufactured by Secure Site Design, L.L.C. All specifications are subject to change. Contact manufacturer for details.

1.2 SUBMITTALS

- A. Specifications Drawing: Detail drawing of product including overall dimensions and options.
- B. Samples: Various component samples available upon request.
- C. Qualifications: Installer must submit evidence of a successful installation history with comparable materials and designs specified.

1.3 DELIVERY, STORAGE, and HANDLING

- A. Delivery: Deliver products to site in manufacturer's original, unopened containers and packaging. Upon delivery, examine packages immediately to ensure all products are complete and undamaged.
- B. Storage: Store products in a protected, dry area in manufacturer's unopened containers and packaging.
- C. Handling: Protect product's finish from damage during handling and installation.

1.4 COORDINATION

- A. Coordinate with site work and other appropriate sections of the specifications to maintain proper provisions of the work specified.
- B. All site furnishings shall be laid out in the field and approved prior to installation.

PART 2 PRODUCTS

2.1 MANUFACTURER

- A. Secure Site Design, L.L.C.
P.O. Box 307,
Dunkirk, MD 20754 U.S.A.
Toll Free (USA & Canada): 1-888-ANTI-RAM (888-268-4726)
410-286-3375 : Fax 410-479-0175
info@securesitedesign.com
www.securesitedesign.com

2.2 STEEL BIKE RACK

- A. Type: BRCS-105 from the Cycle Sentry™ Series

2.3 MATERIALS

- A. 2-3/8" (60mm) O.D. tubular steel
- B. 5" (127mm) surface mount flange

2.4 OPTIONS

- A. Colors: Standard: Bronze, Black, Green, Tavern Square Green, Teal, Blue, Burgundy, Red, Gray, White. Available with Optional Metallics: Silver, and Titanium, (custom colors available, including the RAL range).
- B. Mounting: Standard in-ground and Flanged surface

2.5 FINISHES

- A. All powder coat finishes are done at Victor Stanley, Inc. (VSI) to match the VSI product line.
- B. All fabricated metal components are steel shotblasted, etched, phosphatized, preheated, and electrostatically powder-coated with TGIC polyester powder coatings. Products are fully cleaned and pretreated, preheated and coated while hot to fill crevices and build coating film. Coated parts are fully cured to coating manufacturer's specifications. The thickness of the resulting finish averages 8-10 mils (200-250 microns).

- C. In high salt abusive climates, hot-dip galvanizing before powder coating is available. Hot dip galvanizing is performed for Victor Stanley, Inc. by an experienced qualified firm to which products are shipped for galvanizing. Hot-dip galvanizing includes an aggressive pre-treatment and immersion in a tank of charged liquid zinc at or around 860°F (460°C). The resulting surface is resistant to rust but has some unevenness resulting from the bonding of the zinc to the steel surface. As a result, the powder-coating surface finish over that galvanized surface may exhibit bumps, unevenness, and may not be as smooth as Victor Stanley, Inc.'s standard finish; this uneven and inconsistent finish is normal for hot-dip galvanizing. Most fabricated metal components and castings can be hot-dip galvanized, please contact manufacturer for details.
- D. All items available hot dip galvanized without powder coating.

PART 3 EXECUTION

3.1 INSTALLATION

A. Mounting:

- a. Standard in-ground: It is not recommended to locate footing(s) until bike rack is in place. This Secure Site Design, L.L.C. product must be permanently affixed in the ground. Consult your local codes for regulations.
- b. Standard surface: Clearance for 1/2" (13mm) anchor bolts (anchor bolts not provided by Secure Site Design, L.L.C.). It is not recommended to locate anchor bolts until bike rack is in place. This Secure Site Design, L.L.C. product must be permanently affixed to the ground. Consult your local codes for regulations.

3.2 PROTECTION

- A. Protect products prior to installation by having them remain in the manufacturer's packaging and container.