

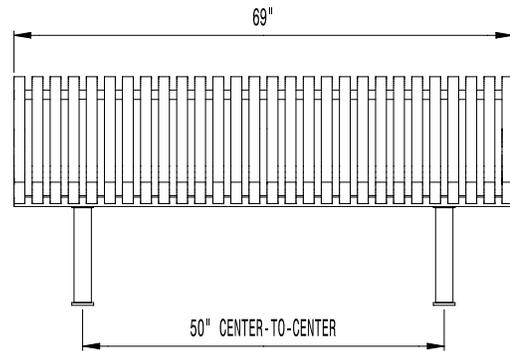
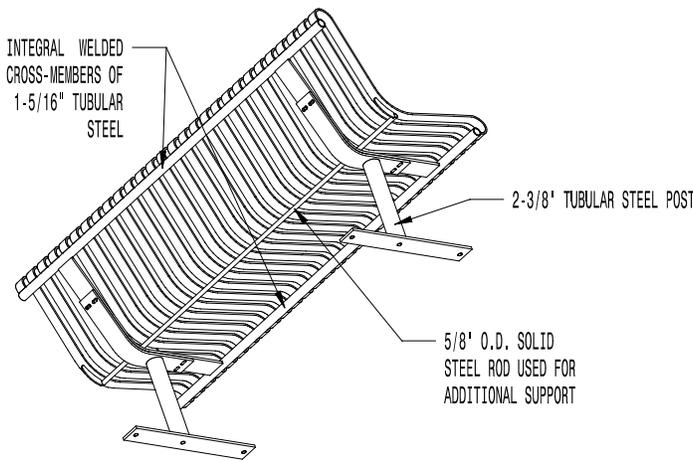


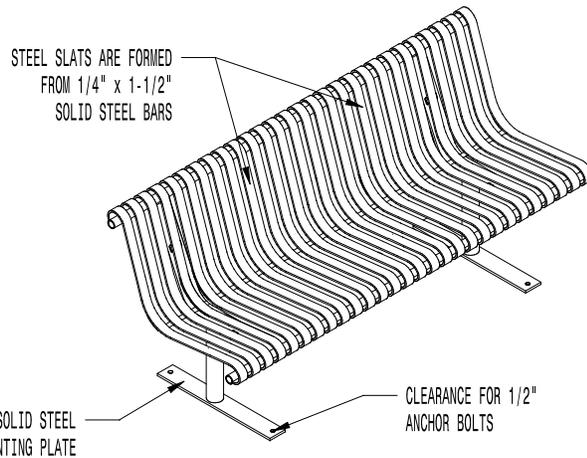

VICTOR STANLEY, INC.®
-Manufacturers of Quality Site Furnishings since 1962-

P.O. DRAWER 330 - DUNKIRK, MD 20754 USA
 TOLL FREE: (800) 368-2573 (USA & CANADA)
 TEL (301) 855-8300 - FAX (410) 257-7579
 WEB SITE: HTTP://WWW.VICTORSTANLEY.COM

* ALL DIMENSIONS ARE IN INCHES *

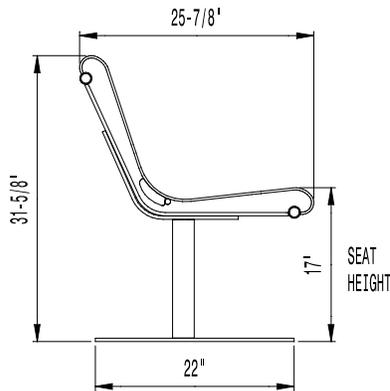

AVAILABLE OPTIONS:

POWDER COATING

10 STANDARD COLORS, 2 OPTIONAL METALLIC COLORS,
 CUSTOM COLORS (INCLUDING THE RAL RANGE)

INTERMEDIATE ARMRESTS

4', 6', & 8' AVAILABLE WITH OPTIONAL ARMRESTS

LENGTHS


STANDARD 4'
 STANDARD 6' LENGTH SHOWN
 STANDARD 8'

MOUNTING

STANDARD IN-GROUND AND SURFACE (AS SHOWN)
 AVAILABLE WITH OPTIONAL GULL-WING AND WALL

NOTES:

1. DRAWINGS NOT TO SCALE. DO NOT SCALE DRAWINGS.
2. ALL FABRICATED METAL COMPONENTS ARE STEEL SHOTBLASTED, ETCHED, PHOSPHATIZED, PREHEATED, AND ELECTROSTATICALLY POWDER-COATED WITH T.G.I.C. POLYESTER POWDER COATINGS. PRODUCTS ARE FULLY CLEANED AND PRETREATED, PREHEATED AND COATED WHILE HOT TO FILL CREVICES AND BUILD COATING FILM. COATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH AVERAGES 8-10 MILS (200-250 MICRONS).
3. IT IS NOT RECOMMENDED TO LOCATE ANCHOR BOLTS UNTIL BENCH IS IN PLACE. THIS VICTOR STANLEY, INC. PRODUCT MUST BE PERMANENTLY AFFIXED TO THE GROUND. CONSULT YOUR LOCAL CODES FOR REGULATIONS.
4. ANCHOR BOLTS NOT PROVIDED BY VICTOR STANLEY, INC.
5. FOR HIGH SALT ABUSIVE CLIMATES, HOT DIP GALVANIZING BEFORE POWDER COATING IS AVAILABLE. SEE WRITTEN SPECIFICATIONS FOR DETAILS.
6. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
7. THIS PRODUCT IS SHIPPED PARTIALLY UNASSEMBLED.



NRB-6

STEELSITES™ SERIES





STEEL SLAT BENCH
 SHOWN: STANDARD 6-FOOT LENGTH
 STANDARD SURFACE MOUNT



VICTOR STANLEY, INC.®
-Manufacturers of Quality Site Furnishings since 1962-

P.O. DRAWER 330 - DUNKIRK, MD 20754 USA
 TOLL FREE: (800) 368-2573 (USA & CANADA)
 TEL (301) 855-8300 - FAX (410) 257-7579
 WEB SITE: HTTP://WWW.VICTORSTANLEY.COM

* ALL DIMENSIONS ARE IN INCHES *

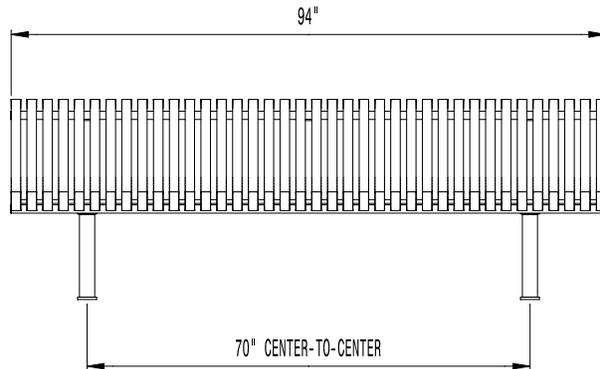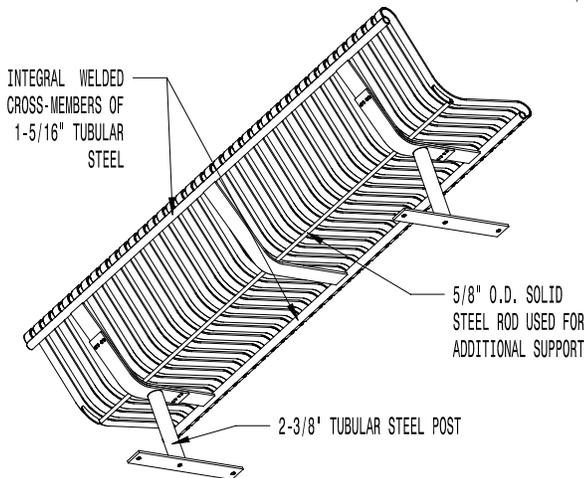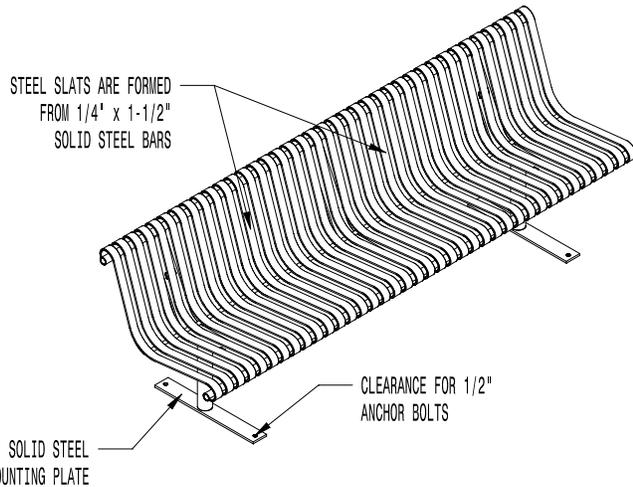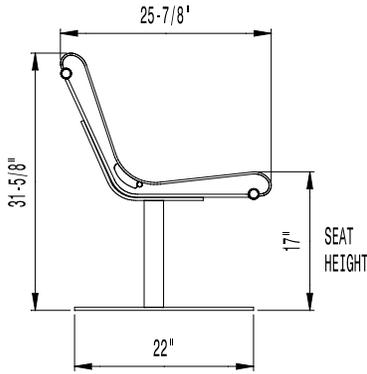

AVAILABLE OPTIONS:

POWDER COATING

10 STANDARD COLORS, 2 OPTIONAL METALLIC COLORS,
 CUSTOM COLORS (INCLUDING THE RAL RANGE)

INTERMEDIATE ARMRESTS

4', 6', & 8' AVAILABLE WITH OPTIONAL ARMRESTS

LENGTHS


STANDARD 4'
 STANDARD 6'
 STANDARD 8' LENGTH SHOWN

MOUNTING

STANDARD IN-GROUND AND SURFACE (AS SHOWN)
 AVAILABLE WITH OPTIONAL GULL-WING AND WALL

NOTES:

1. DRAWINGS NOT TO SCALE. DO NOT SCALE DRAWINGS.
2. ALL FABRICATED METAL COMPONENTS ARE STEEL SHOTBLASTED, ETCHED, PHOSPHATIZED, PREHEATED, AND ELECTROSTATICALLY POWDER-COATED WITH T.G.I.C. POLYESTER POWDER COATINGS. PRODUCTS ARE FULLY CLEANED AND PRETREATED, PREHEATED AND COATED WHILE HOT TO FILL CREVICES AND BUILD COATING FILM. COATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH AVERAGES 8-10 MILS (200-250 MICRONS).
3. IT IS NOT RECOMMENDED TO LOCATE ANCHOR BOLTS UNTIL BENCH IS IN PLACE. THIS VICTOR STANLEY, INC. PRODUCT MUST BE PERMANENTLY AFFIXED TO THE GROUND. CONSULT YOUR LOCAL CODES FOR REGULATIONS.
4. ANCHOR BOLTS NOT PROVIDED BY VICTOR STANLEY, INC.
5. FOR HIGH SALT ABUSIVE CLIMATES, HOT DIP GALVANIZING BEFORE POWDER COATING IS AVAILABLE. SEE WRITTEN SPECIFICATIONS FOR DETAILS.
6. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
7. THIS PRODUCT IS SHIPPED PARTIALLY UNASSEMBLED.



NRB-6

STEELSITES™ SERIES

STEEL SLAT BENCH
 SHOWN: STANDARD 8-FOOT LENGTH
 STANDARD SURFACE MOUNT

SECTION 12 93 00 (02870)
SITE FURNISHINGS

PART 1 GENERAL

Model: NRB-6

1.1 DESCRIPTION

- A. Section includes information, materials, and options for products manufactured by Victor Stanley, Inc. All specifications are subject to change. Contact manufacturer for details.

1.2 SUBMITTALS

- A. Specifications Drawing: Detail drawing of product including overall dimensions and options.
- B. Samples: Various component samples available upon request.
- C. Qualifications: Installer must submit evidence of a successful installation history with comparable materials and designs specified.

1.3 DELIVERY, STORAGE, and HANDLING

- A. Delivery: Deliver products to site in manufacturer's original, unopened containers and packaging. Upon delivery, examine packages immediately to ensure all products are complete and undamaged.
- B. Storage: Store products in a protected, dry area in manufacturer's unopened containers and packaging.
- C. Handling: Protect product's finish from damage during handling and installation.

1.4 COORDINATION

- A. Coordinate with site work and other appropriate sections of the specifications to maintain proper provisions of the work specified.
- B. All site furnishings shall be laid out in the field and approved prior to installation.

PART 2 PRODUCTS

2.1 MANUFACTURER

- A. Victor Stanley, Inc.
P.O. Drawer 330
Dunkirk, MD 20754 USA
Toll Free: (800) 368-2573 (USA & Canada)
Tel: (301) 855-8300 Fax: (410) 257-7579
E-mail: sales@victorstanley.com
Web site: <http://www.victorstanley.com>

2.2 BENCH

- A. Type: Model NRB-6 from the Steelsites™ Series

2.3 MATERIALS

- A. Scrolled vertical steel slats are formed from 1/4" x 1-1/2" (6mm x 38mm) solid steel bars; steel slats are welded to cross members of 1-5/16" (33mm) tubular steel; 2-3/8" (60mm) diameter tubular steel legs

2.4 OPTIONS

- A. Standard lengths: 4ft (1.2 meter), 6ft (1.8 meter), and 8ft (2.4 meter) (custom lengths available)
- B. Armrest(s)
- C. Mounting: Standard in-ground or surface; available with optional gull-wing or wall
- D. Standard Colors: Bronze, Black, Green, Tavern Square Green, Teal, Blue, Burgundy, Red, White, Gray. Available with Optional Metallics: Silver, and Titanium, (custom colors available, including the RAL range).

FINISHES

- A. All fabricated metal components are steel shotblasted, etched, phosphatized, preheated, and electrostatically powder-coated with TGIC polyester powder coatings. Products are fully cleaned and pretreated, preheated and coated while hot to fill crevices and build coating film. Coated parts are fully cured to coating manufacturer's specifications. The thickness of the resulting finish coat averages 8-10 mils (200-250 microns).
- B. In high salt abusive climates, hot-dip galvanizing before powder coating is available. Hot dip galvanizing is performed for Victor Stanley, Inc. by an experienced qualified firm to which products are shipped for galvanizing. Hot-dip galvanizing includes an aggressive pre-treatment and immersion in a tank of charged liquid zinc at or around 860°F (460°C). The resulting surface is resistant to rust but has some unevenness resulting from the bonding of the zinc to the steel surface. As a result, the powder-coating surface finish over that galvanized surface may exhibit bumps, unevenness, and may not be as smooth as Victor Stanley, Inc.'s standard finish; this uneven and inconsistent finish is normal for hot-dip galvanizing. Most fabricated metal components and castings can be hot-dip galvanized, please contact manufacturer for details.

PART 3 EXECUTION

3.1 INSTALLATION

- A. Mounting:
 - a. Standard in-ground: It is not recommended to locate footing(s) until bench is in place. This Victor Stanley, Inc. product must be permanently affixed in the ground. Consult your local codes for regulations.
 - b. Standard surface: Clearance for 1/2" (13mm) anchor bolts (anchor bolts not provided by Victor Stanley, Inc.) It is not recommended to locate anchor bolts until bench is in place. This Victor Stanley, Inc. product must be permanently affixed to the ground. Consult your local codes for regulations.

3.2 PROTECTION

- A. Protect products prior to installation by having them remain in the manufacturer's packaging and container.